

# Kennebunkport Quadrangle, Maine

Surficial geologic mapping by  
**Geoffrey W. Smith**

Digital cartography by:  
**Susan S. Tolman**

**Robert G. Marvinney**  
*State Geologist*

Cartographic design and editing by:  
**Robert D. Tucker**

Funding for the preparation of this map was provided in part by the U.S. Geological Survey  
Cooperative Geological Mapping (COGEMAP) Program, Cooperative Agreement No. 14-08-0001-A0381.




## Maine Geological Survey

**Address:** 22 State House Station, Augusta, Maine 04333  
**Telephone:** 207-287-2801 **E-mail:** mgs@maine.gov  
**Home page:** <http://www.maine.gov/doc/nrmc/nrmc.htm>

**Open-File No. 99-87**  
**1999**

For additional information,  
see Open-File Report 99-118.

# Surficial Geology

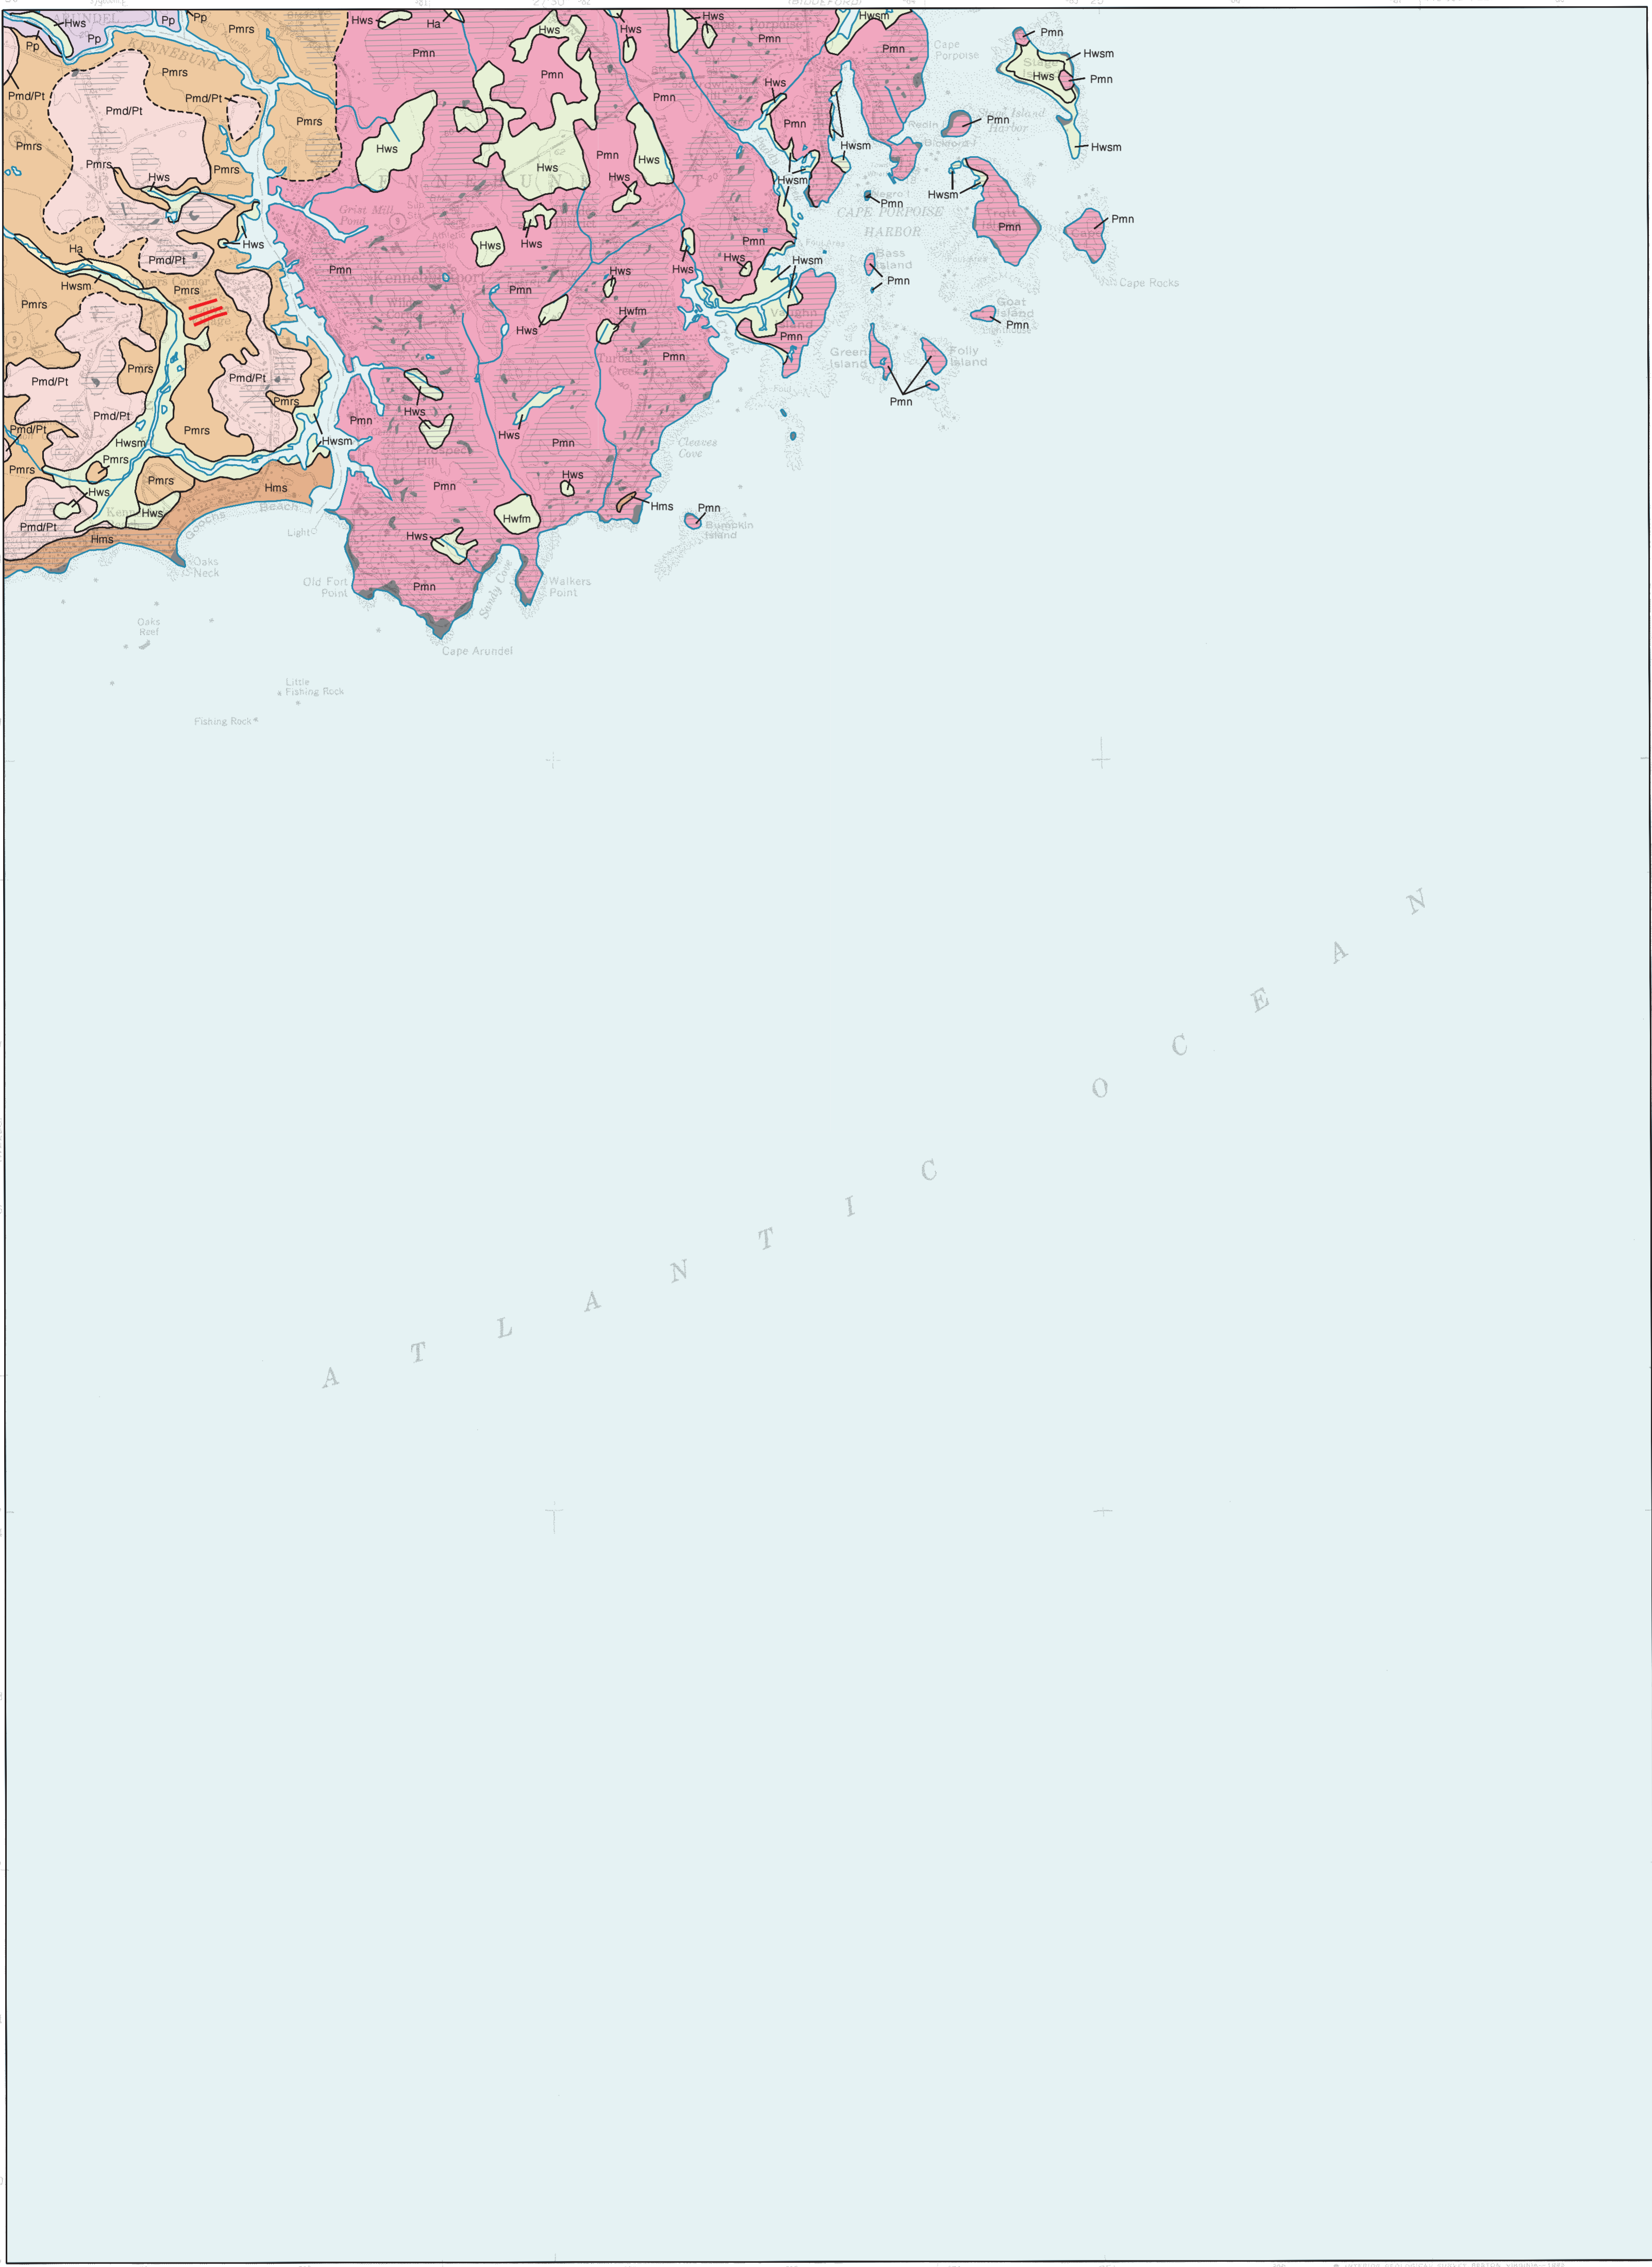


### SOURCES OF INFORMATION

Surficial geologic mapping by Geoffrey W. Smith completed during the 1987 field season; funding for this work provided by the U. S. Geological Survey COGEMAP program. Wetlands data provided in part by Cornelia C. Cameron, U.S. Geological Survey, 1988. Geologic unit designations and contacts revised and matched to adjacent quadrangles in 1999 by MGS geologists.



Quadrangle Location

SCALE 1 : 24,000

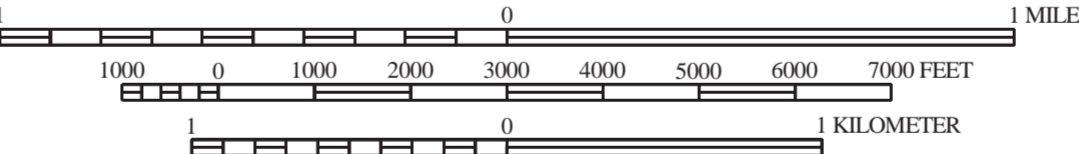

CONTOUR INTERVAL 20 FEET



Topographic base from U.S. Geological Survey Kennebunkport quadrangle, scale 1:24,000 using standard U.S. Geological Survey topographic map symbols.

The use of industry, firm, or local government names on this map is for location purposes only and does not implicate responsibility for any present or potential effects on the natural resources.

<b>Ha</b>	<b>Stream alluvium</b> - Gray to brown fine sand and silt with some gravel. Comprises flood plains along present streams and rivers. Extent of alluvium approximates areas of potential flooding.
<b>Hws</b>	<b>Wetland, swamp</b> - Muck, peat, silt, and sand. Poorly drained areas, often with standing water.
<b>Hwfm</b>	<b>Wetland, freshwater marsh</b> - Poorly drained freshwater grassland.
<b>Hwsm</b>	<b>Wetland, saltmarsh</b> - Muck, peat, silt, and sand. Coastal settings subject to tidal fluctuation.
<b>Hms</b>	<b>Marine shoreline deposit, beach</b> - Sand, some gravel and minor silt. Coastal settings of active beach construction.
<b>Pmn</b>	<b>Marine nearshore deposits</b> - Areas of till that have been reworked by the sea during regressive phase of marine submergence. Till has had finer constituents (silt and sand) removed and redeposited as thin veneer over till. Bedrock commonly at shallow depth. Average thickness probably less than 3 m. Locally, this unit may include marine clay and sand, as well as isolated boulders.
<b>Pmrs</b>	<b>Marine regressive sand deposits</b> - Massive to stratified and cross-stratified, well sorted brown to gray brown sand. Generally with gradational basal contact to Pp. Thickness between 1 and 5 m. Deposited during regressive phase of marine submergence.

<b>Pp</b>	<b>Presumpscot Formation</b> - Massive to laminated gray and blue gray (weathering brown) silt and silty clay. Locally may contain boulders, sand, gravel. Occurs as blanket deposit over bedrock and older glacial sediments. Variable thickness from less than 1 m to more than 50 m. Deposited during period of late-glacial marine submergence.
<b>Pmd</b>	<b>Marine delta</b> - Coarse sand and gravel grading to sand and silt. Flat to gently sloping constructional surface formed by glacial streams discharging into late-glacial sea.
<b>Pt</b>	<b>Till</b> - Gray to gray brown poorly sorted mixture of silt, sand, pebbles, cobbles, and boulders. Forms a blanket deposit over bedrock, and is inferred to underlie younger sediments where not exposed at surface. Thin over topographic highs; thickens in topographic lows. Averages 3 to 5 m in thickness.
	<b>Bedrock</b> - Rock units not distinguished. Individual outcrops not shown in large areas of poor access. Ruled pattern indicates areas where surficial materials are thin (less than 1 to 2 m) and bedrock exposures are common. Gray areas show bedrock exposure and are mapped in part from aerial photographs.
	<b>Contact</b> - Boundary between map units (dashed where approximate).
	<b>End moraine</b> - Ridge of sand and gravel or till deposited at margin of glacier. May be largely buried by younger sediments.

### USES OF SURFICIAL GEOLOGY MAPS

A surficial geology map shows all the loose materials such as till (commonly called hardpan), sand and gravel, or clay, which overlie solid ledge (bedrock). Bedrock outcrops and areas of abundant bedrock outcrops are shown on the map, but varieties of the bedrock are not distinguished (refer to bedrock geology map). Most of the surficial materials are deposits formed by glacial and deglacial processes during the last stage of continental glaciation, which began about 25,000 years ago. The remainder of the surficial deposits are the products of postglacial geologic processes, such as river floodplains, or are attributed to human activity, such as fill or other land-modifying features.

The map shows the areal distribution of the different types of glacial features, deposits, and landforms as described in the map explanation. Features such as striations and moraines can be used to reconstruct the movement and position of the glacier and its margin, especially as the ice sheet melted. Other ancient features include shorelines and deposits of glacial lakes or the glacial sea, now long gone from the state. This glacial geologic history of the quadrangle is useful to the larger understanding of past earth climate, and how our region of the world underwent recent geologically significant climatic and environmental changes. We may then be able to use this knowledge in anticipation of future similar changes for long-term planning efforts, such as coastal development or waste disposal.

Surficial geology maps are often best used in conjunction with related maps such as surficial materials maps or significant sand and gravel aquifer maps for anyone wanting to know what lies beneath the land surface. For example, these maps may aid in the search for water supplies, or economically important deposits such as sand and gravel for aggregate or clay for bricks or pottery. Environmental issues such as the location of a suitable landfill site or the possible spread of contaminants are directly related to surficial geology. Construction projects such as locating new roads, excavating foundations, or siting new homes may be better planned with a good knowledge of the surficial geology of the site. Refer to the list of related publications below.

### OTHER SOURCES OF INFORMATION

- Smith, G. W., 1999, Surficial geology of the Kennebunkport quadrangle, York County, Maine: Maine Geological Survey, Open-File Report 99-118, 5 p.
- Smith, G. W., 1998, Surficial materials of the Kennebunkport quadrangle, Maine: Maine Geological Survey, Open-File Map 98-165.
- Thompson, W. B., 1979, Surficial geology handbook for coastal Maine: Maine Geological Survey, 68 p. (out of print)
- Thompson, W. B., and Borns, H. W., Jr., 1985, Surficial geologic map of Maine: Maine Geological Survey, scale 1:500,000.
- Thompson, W. B., Crossen, K. J., Borns, H. W., Jr., and Andersen, B. G., 1989, Glaciomarine deltas of Maine and their relation to late Pleistocene-Holocene crustal movements, in Anderson, W. A., and Borns, H. W., Jr. (eds.), Neotectonics of Maine: Maine Geological Survey, Bulletin 40, p. 43-67.